

# monitor Lifts

## 80SX - Rough Terrain Scissor Lift

80SX Monitor Lifts




Monitor 80SX is designed for both indoor and outdoor use. Thanks to the continuous 4 wheel drive the all terrain capabilities of the Monitor 80SX are excellent. The 80SX is equipped with four hydraulic outriggers which enables working on uneven grounds also. Unlike most battery powered scissor lifts the Monitor 80SX can work on sites with sandy ground. The compact dimensions make it a great indoor lift.



## Technical Features

### SPECIFICATIONS

Safe working load .....	225 kg
Number of persons+additional load .....	2 persons + 65 kg
Max. working height .....	8,0 m
Max. platform height .....	6,0 m
Platform extensions .....	1,2 m
Max. wind speed .....	12,5 m/s
Outrigger spread length x width .....	2,3 m x 1,3 m
Transport length .....	2,80 m
Transport width .....	1,00 m
Transport height .....	2,05 m
Platform length x width (length with extension).....	0,92 m x 2,2 m (3,4 m)
Weight (depending on equipment) .....	ca. 1.450 kg
Powered by either or both:	
Electric motor .....	230V 1,5 kW /10A
Petrol engine .....	Honda GX390 13 hp

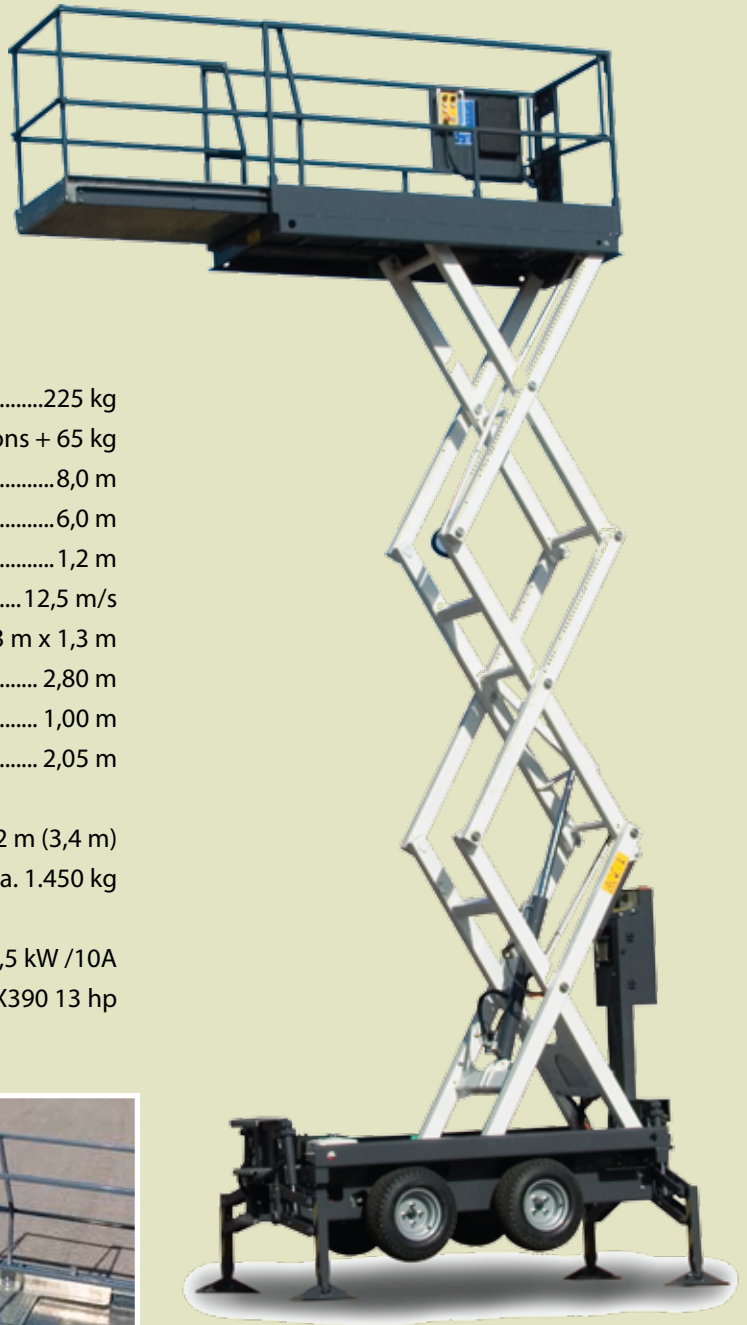

*Petrol engine (option)*



*Platform extension 1,2 m (option)*



*Hand pump for service use*



*Easy to operate*



*Frame holes for forklift transport*